

ANTONG FITTINGS & FLANGES

Http://antongcorp.com

ANSI ASME Reducing Flanges

*Dimensions, Sizes and Specification of ANSI ASME Reducing Flanges
Class 150 to Class 2500*




ANTONG FITTINGS & FLANGES

Http://antongcorp.com

Mail: sales@antongcorp.com

Tel: 008631180763668

ANSI ASME Reducing Flange Class 150-2500

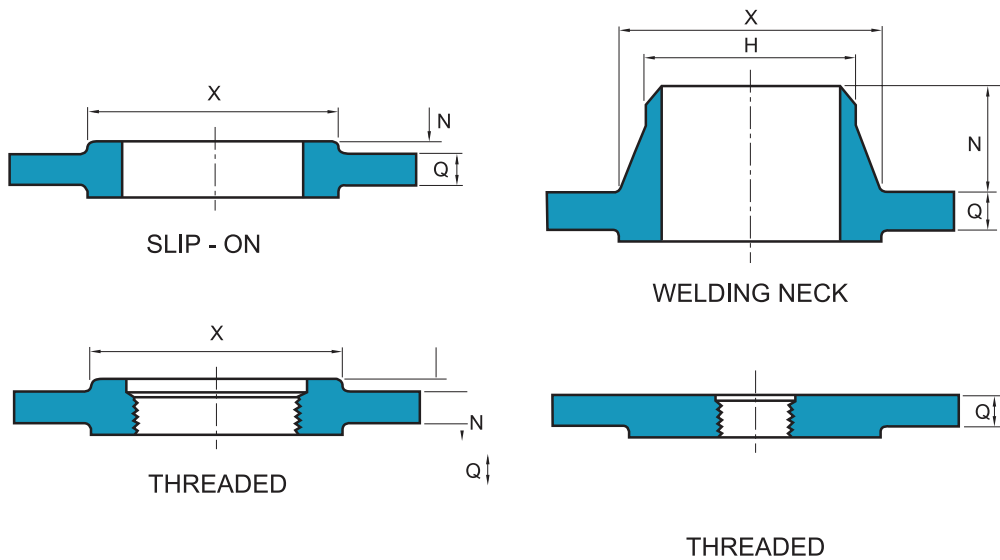

150LB-2500LB

Unit : mm

Nominal Flange Size	Outside Diameter of Flange From Which Reduction is Being Made							Smallest Size Bore or Tapping Requiring Hub Flange
	150 LB. Standard	300 LB. Standard	400 LB. Standard	600 LB. Standard	900 LB. Standard	1500 LB. Standard	2500 LB. Standard	
3/4	98.5	117.5	117.5	117.5	130.0	130.0	139.7	1/2
1	108.0	124.0	124.0	124.0	149.4	149.4	158.8	1/2
1 1/4	117.5	133.5	133.5	133.5	158.8	158.8	184.2	1/2
1 1/2	127.0	155.5	155.5	155.5	177.8	177.8	203.2	1/2
2	152.5	165.0	165.0	165.0	215.9	215.9	235.0	1
2 1/2	178.0	190.5	190.5	190.5	244.3	244.3	266.7	1 1/4
3	190.5	209.5	209.5	209.5	241.3	266.7	304.8	1 1/4
3 1/2	216.0	228.5	228.5	228.5	-	-	-	1 1/2
4	228.5	254.0	254.0	273.0	292.1	311.2	355.6	1 1/2
5	254.0	279.5	279.5	330.0	349.3	374.7	419.1	1 1/2
6	279.5	317.5	317.5	355.5	381.0	393.7	482.6	2 1/2
8	343.0	381.0	381.0	419.0	470.0	482.6	552.5	3
10	406.5	444.5	444.5	508.0	546.1	584.2	673.1	3 1/2
12	482.5	520.5	520.5	559.0	609.6	673.1	762.0	3 1/2
14	533.5	584.0	584.0	603.5	641.4	749.3	-	3 1/2
16	597.0	647.5	647.5	686.0	705.0	825.5	-	4
18	635.0	711.0	711.0	743.0	787.4	914.4	-	4
20	698.5	774.5	774.5	813.0	857.3	984.3	-	4
24	813.0	914.5	914.5	940.0	1041.4	1168.4	-	4

NOTE : For reductions to sizes smaller than shown, Blind Flanges are tapped or bored for specified nominal pipe size.

More Information, please visit our website:

[Http://antongcorp.com](http://antongcorp.com)



ANTONG FITTINGS & FLANGES

[Http://antongcorp.com](http://antongcorp.com)

Mail: sales@antongcorp.com

Tel: 008631180763668